




Precision & Safety

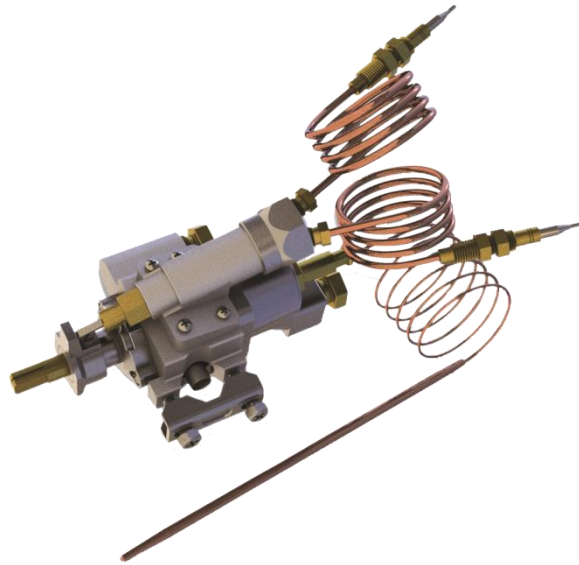

412

Applicable standard	EN 126
• Functional characteristics	
Operational temperature	125-275 °C
Max. bulb temperature	300 °C
Max. operating pressure	65 mbar
Gas inlet	DN 8
Gas outlet oven & grill	G 1/4" or M13 × 1
Operating torque	≤ 0.6 N.m
Operating force	≤ 45 N
Internal leak	≤ 20 cc/h (P=150 mbar)
External leak	≤ 60 cc/h (P=150 mbar)
• Magnet	
Holding current	≤ 180 mA
Release current	≥ 60 mA
Installation position	Inlet connection with two screws (M5 × 0.8)
Thermocouple connection	M8 × 1

